
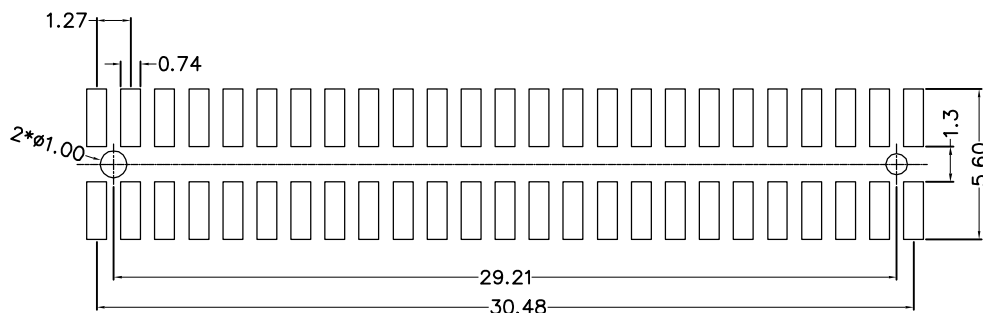

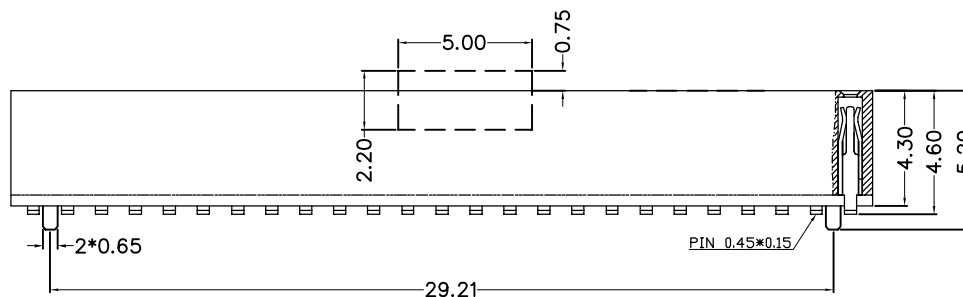


REACH & RoHS
COMPLIANT

REV.	ECN / DESCRIPTION	BY	DATE
A0	NEW	ZG.HU	2018.05.09

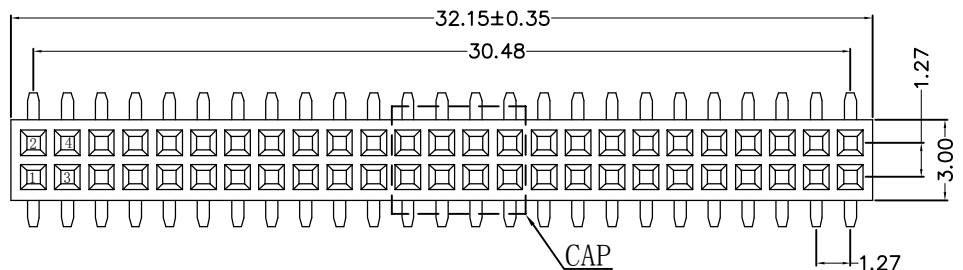

RECOMMEND P. C. B. BOARD LAYOUT
PCB TOLERANCE:±0.05 (TOP VIEW)

SPECIFICATIONS (规范)>>>

Current Rating (额定电流): 1.0Amps
 Withstanding Voltage (耐电压): AC 500Vmin/Minute
 Insulation Resistance (绝缘电阻): 1000MΩ Min
 Contact Resistance (接触电阻): 20 mΩ MAX
 Operating Temperature (工作温度): -40°Cto+105°C
 Material (材料)>>>
 Plastic material (塑胶材质): LCP
 Color (颜色): Black
 Insulating Material (绝缘材料): Polyester(UL94V-0)
 Contact Material (接触材料): Phosphor Bronze
 \Contact Plating (接触电镀): Au Or Sn over 40u" Ni

DGKYD

东莞市科优达电子科技有限公司
Dong Guan Ke You Da Electronic Tech.Co.,Ltd

ADD: No.1 LiHe Street, LiHeng Village, Qingxi town, DongGuan City, Guangdong Province
Tel: +86-0769-87334608; Fax: +86-0769-87847129 WWW.DGKYD.COM

TITLE: FH1.27 2X25P SMT U型 H4.3 加盖卷装	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: JP.Gong
PART NO.: DGKYDFH127F25A6A2W3S064	SACLE 1:1	REV A0	x±0.35	x°±3.0°	CHECKED BY: TW.Xu
REMARK:	SHEET 1/1		.x±0.30	.x°±2.0°	DESIGND BY: ZG.Hu
			.xx±0.25	.xx°±1.5°	
			.xxx±0.10	.xxx°±1.0°	